

## Wall Mounted Polycarbonate Fiber Termination Box

### Introduction

For outdoor and direct installation in FTTX applications,  
Designed to withstand harsh weather conditions.

### Features

IP55 protection UV resistant polycarbonate construction.

### Capacity

SC 4 port LC 8 port

100% compliance with Bellcore GR-326 standards

Compatibility with LC duplex and SC simplex adapters

Including additional protectors, fiber cable collectors and wall-mount accessories


### Technical Specifications

**Dimensions** 207 x 152 x 51.7mm

**Material** Polikarbonat

**Color** RAL 7035

**Weight** 0,34 kg / ( 4 ports )

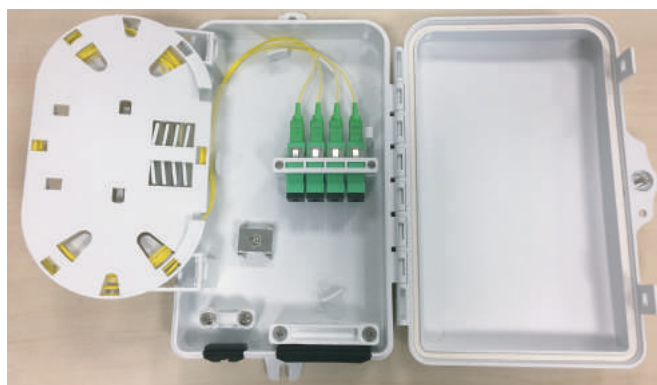

### Specification

Model	Cable Port	Adaptors	PLC splitter	Protection Class
OJC4PTR	2 cable ports ( for cables with max diameter 12mm)	4 SC adaptors	1x4 splitter	IP55