BC FIBER
connect the future
B&C GROUP

FC ADAPTER
SC / LC / FC / ST

Type	Duplex	Simplex
Mode	**Singlemode**	**Singlemode**
Housing material	Plastic LSZH	Plastic LSZH
Alignment sleeve	Ceramic (zirconia)	Ceramic (zirconia)
Insertion loss	< 0,2 dB	< 0,2 dB
Durability		1000
Operating temperature	-40°C to +80°C	-40°C to +80°C
Mode	**Multimode**	**Multimode**
Housing material	Plastic LSZH	Plastic LSZH
Alignment sleeve	Ceramic (zirconia)	Ceramic (zirconia)
Insertion loss	< 0,2 dB	< 0,2 dB
Durability	1000	1000
Operating temperature	-40°C to +80°C	-40°C to +80°C

Available Colors

SM UPC **SM APC** **MULTIMODE**
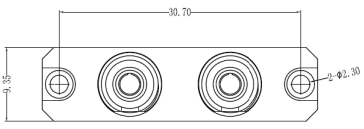
Technical Drawing