


Fiber Attenuator

LC/APC

LC/UPC

LSZH

Low Smoke Zero Halogen

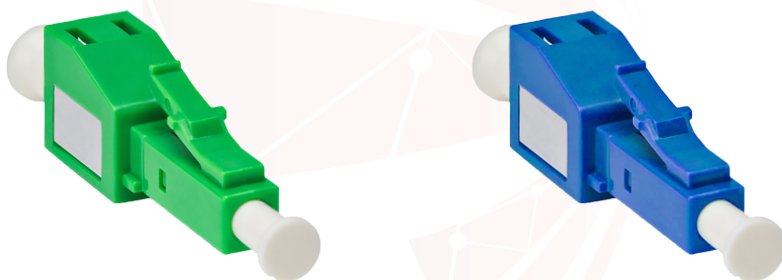

Fiber Connector	LC/APC	LC/UPC
Connector Gender	Fixed Male to Female	Fixed Male to Female
Attenuation	25dB	1-25dB
Attenuation Accuracy	±10dB	1-9dB ±0.5dB, 10-25dB ±%10
Polarization Dependent Loss	≤0.2dB	≤0.2dB
Humidity	95%RH	95%RH
Storage Temp Range	-40~85°C	-40~85°C
Ferrule Type	Zirconia Ceramic	Zirconia Ceramic
Transfer Mode	SM/MM	SM/MM
Operating Wavelength(nm)	1260~1620(SM),850 or 1330 (MM9)	1260~1620(SM),850 or 1330 (MM9)
Return Loss	≥65dB	≥55dB
Max Optical Input Power	200mW	200mW
Operating Temp Range	-40~80°C	-40~80°C

B&C Fiber Group duplex patch leads are manufactured in our own modern facilities from the highest quality optical fiber, terminated with ceramic ferrule connectors of various types. Cable preparation, termination and performance testing is carried out to strictly managed procedures, with high focus on quality control.

All B&C Fiber optical products are 100% optical tested and come with a test certificate. Our products are conform with all industry typical standards: **IEC, EIA, TIA or Telcordia**